



Silicon Carbide Schottky Diode (SiC SBD)

HDF10S065A

1. Product Features:

- Electrically Isolated Package
- Provides 2.5kV Isolation
- Revolutionary semiconductor material - Silicon Carbide
- Temperature independent switching behavior
- Low forward voltage even at high operating temperature
- Excellent thermal performance
- Qualified according to JEDEC for target applications
- Pb-free lead plating; RoHS compliant



Pin 1 – cathode

Pin 2 – anode

Package: Isolated TO-220-2

2. Product Applications

- Solar Inverters
- Uninterruptable Power Supplies (UPS)
- Motor drives
- Power Factor Correction (PFC)
- Switch Mode Power Supplies (SMPS)
- On Board Charger (OBC)

3. Typical Performance Parameters

Tab.1. Typical Performance Parameters

Type	V_{DC}	I_F	Q_C	T_{vjmax}	Marking	Package
HDF10S065A	650V	10A	27nC	175°C	HDF10S065A	Isolated TO-220-2

4. Maximum Ratings

Tab.2. Maximum Ratings

Parameters	Symbol	Value	Unit
Repetitive Peak Reverse Voltage	V_{RRM}	650	V
Surge Peak Reverse Voltage	V_{RSM}	650	V
Continuous Forward Current , $T_c = 25^\circ\text{C}$ $T_c = 125^\circ\text{C}$ $T_c = 140^\circ\text{C}$	I_F	26 14 10	A
Repetitive Peak Forward Surge Current $T_c = 25^\circ\text{C}, t_p = 10\text{ms}$	I_{FRM}	80	
Non-Repetitive Peak Forward Surge Current $T_c = 25^\circ\text{C}, t_p = 10\text{ms}, \text{Half Sine Wave}$	I_{FSM}	90	
Non-Repetitive Peak Forward Current $T_c = 25^\circ\text{C}, t_p = 10\mu\text{s}$	$I_{F, max}$	840	
Power Dissipation $T_c = 25^\circ\text{C}$ $T_c = 140^\circ\text{C}$	P_{tot}	103 24	W
Operating Junction	T_j	-55 to +175	°C
Storage Temperature	T_{stg}	-55 to +175	

5. Thermal Properties

Tab.3. Thermal Properties

Parameters	Symbol	Conditions	Typ. value	Unit
Thermal resistance (junction - case)	$R_{th(j-c)}$		1.45	°C/W

6. Electrical Characteristics

Tab.4. Static Characteristic ($T_{vj} = 25^{\circ}\text{C}$, unless otherwise specified)

Parameters	Symbol	Conditions	Min. value	Typ. value	Max. value	Unit
DC blocking voltage	V_{DC}	$T_j = 25^{\circ}\text{C}$	650	-	-	V
Diode forward voltage	V_F	$I_F = 10\text{A}, T_j = 25^{\circ}\text{C}$ $I_F = 10\text{A}, T_j = 175^{\circ}\text{C}$	- -	1.40 1.70	1.70 -	V
Reverse current	I_R	$V_R = 650\text{V}, T_j = 25^{\circ}\text{C}$ $V_R = 650\text{V}, T_j = 175^{\circ}\text{C}$	- -	1 20	20 -	μA

Tab.5. Dynamic Characteristic ($T_{vj} = 25^{\circ}\text{C}$, unless otherwise specified)

Parameters	Symbol	Conditions	Min. value	Typ. value	Max. value	Unit
Total capacitive charge	Q_C	$V_R = 400\text{V}, Q_C = \int_0^{V_R} C(V)dV$	-	27	-	nC
Total Capacitance	C	$V_R = 0\text{V}, f = 1\text{MHz}$ $V_R = 200\text{V}, f = 1\text{MHz}$ $V_R = 400\text{V}, f = 1\text{MHz}$	- - -	536 48 47	- - -	pF
Capacitance Stored Energy	E_C	$V_R = 400\text{V}$	-	6.6	-	μJ

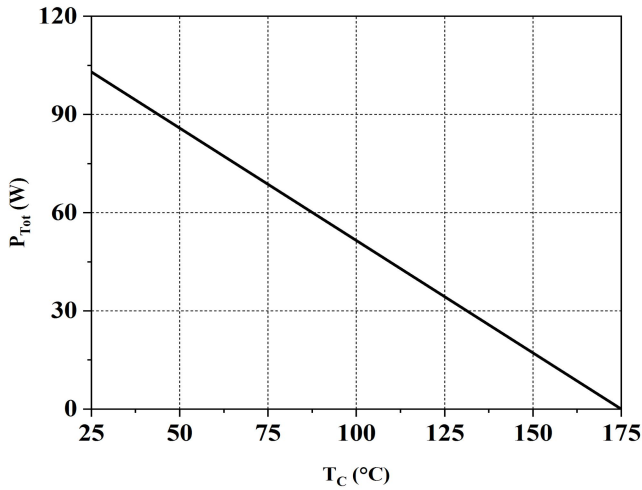


Fig.1. Power dissipation as a function of case temperature

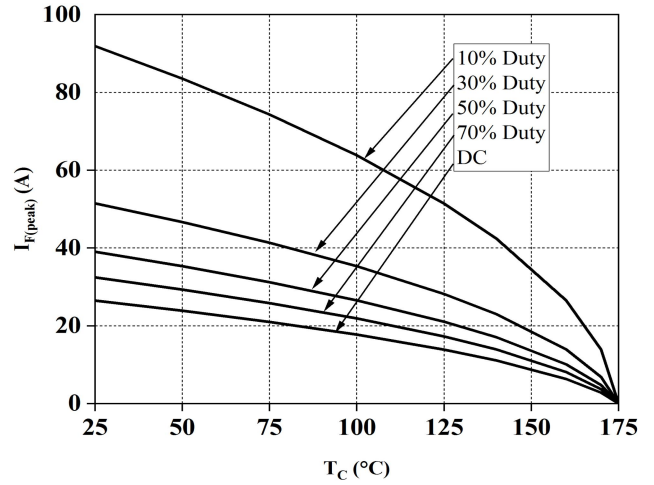


Fig.2. Diode forward current as function of case temperature

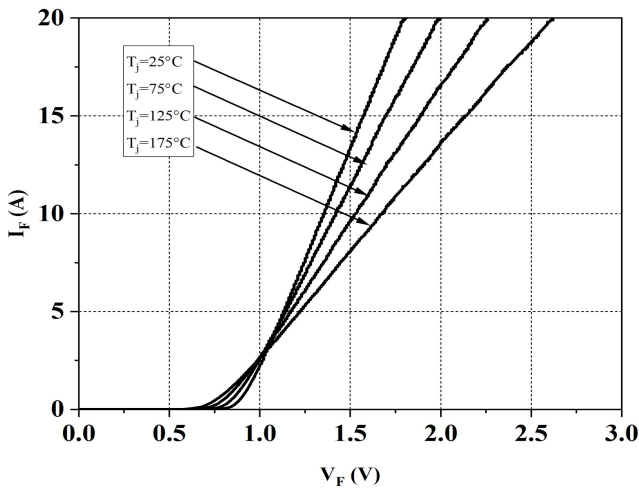


Fig.3. Typical forward characteristics

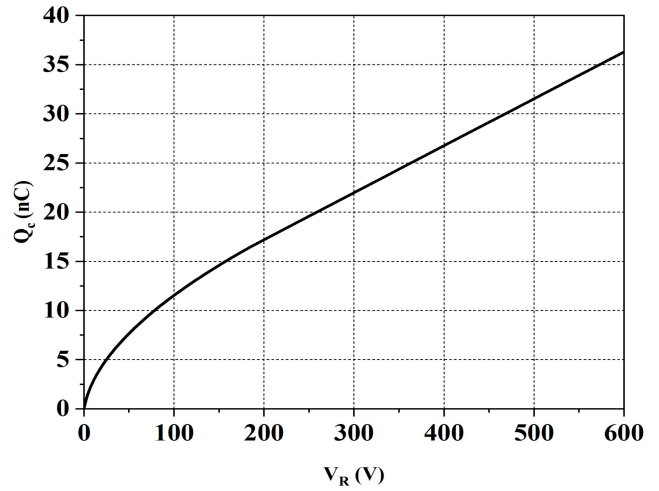


Fig.4. Typical capacitance charge as function of reverse voltage

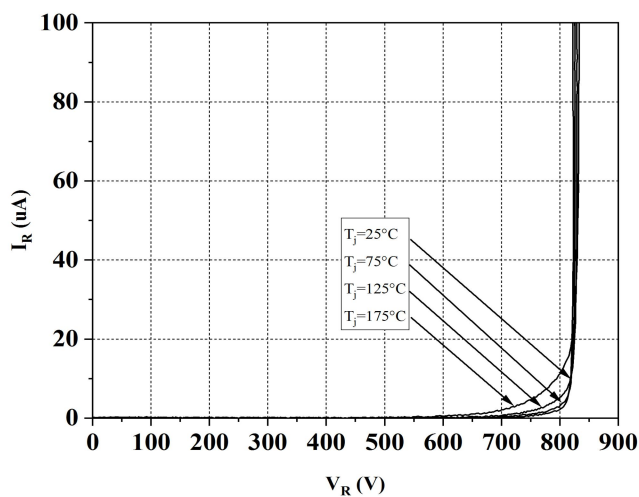


Fig.5. Typical reverse current as function of reverse voltage

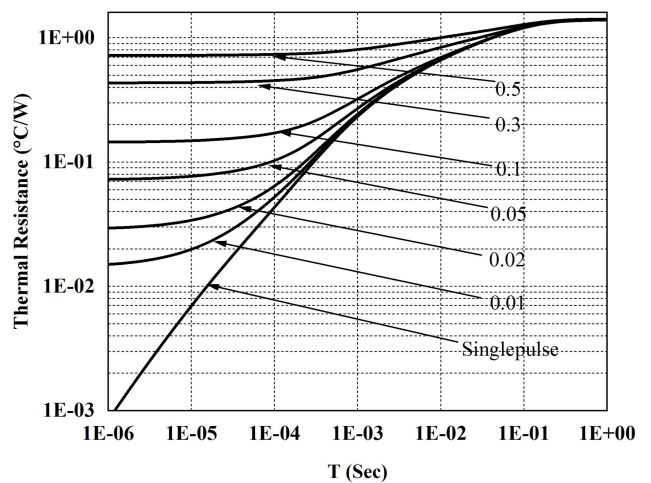


Fig.6. Max. transient thermal impedance

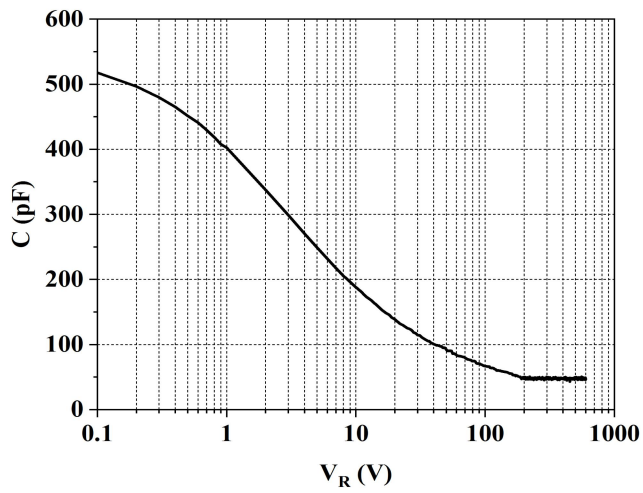


Fig.7. Typical capacitance as function of reverse voltage


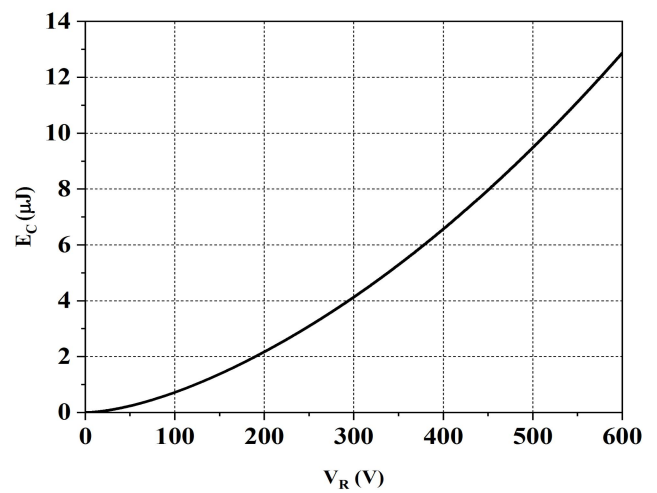


Fig.8. Typical capacitance stored energy as function of reverse voltage

7. Package Dimensions

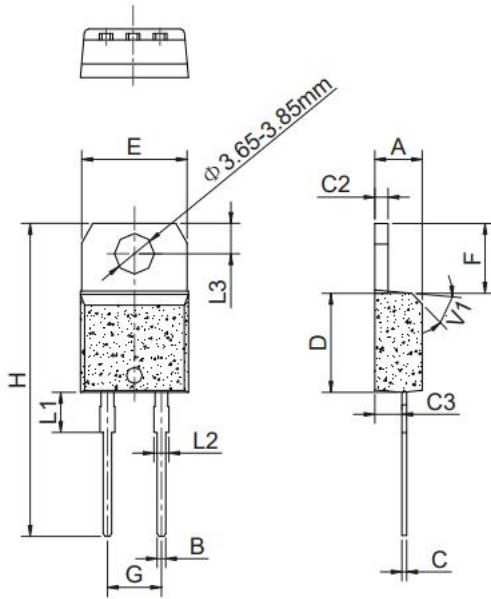

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	4.40		4.60	0.173		0.181
B	0.61		0.88	0.024		0.035
C	0.46		0.70	0.018		0.028
C2	1.21		1.32	0.048		0.052
C3	2.40		2.72	0.094		0.107
D	8.60		9.70	0.339		0.382
E	9.80		10.4	0.386		0.409
F	6.55		6.95	0.258		0.274
G		5.08			0.200	
H	28.0		29.8	1.102		1.173
L1		3.75			0.148	
L2	1.14		1.70	0.045		0.067
L3	2.65		2.95	0.104		0.116
V1		45°			45°	

8. Version Information

Version No.	Date	Version revision record
V1.0	2022/05	First release